

Water Separators



Eliminate corrosion, damage to tools and machinery downtime with efficient bulk water removal.

The nano F-Series¹ range of water separators eliminate 99% of liquids in your compressed air or gas system improving your processes and reducing costly downtime.

The unique fins on the internal centrifugal module have been engineered using the latest computational fluid dynamic software to optimize liquid removal efficiency across a wide range of operating conditions. The F-Series¹ water separators are perfectly suited for variable speed compressors.

An internal shield ensures that the separated liquids cannot re-enter the air or gas stream greatly improving drainage and further improving separation performance.

Exceptional performance

With a housing manufactured from die cast aluminum and polyester powder coated for optimum corrosion protection, the nano F-Series¹ are designed to provide a long life of reliable separation in even the most demanding applications.

Manufactured in an ISO 9001 approved facility and tested in accordance with ISO 12500-4.



Applications Include:

Electronics

Instrumentation

Laboratories

Automotive

Robotics

Oil & Gas

Paint Applications

Pneumatic Conveying

nano-purification solutions
11330 Vanstory Drive
Huntersville, NC 28078
USA

Tel: (704) 897-2182
Fax: (704) 897-2183
Email: support@n-psi.com
web: www.n-psi.com

Technical Specification

Filter Model	Inlet & Outlet Connections	Maximum Rated Flow ⁽¹⁾		Dimensions (inches)				Approximate Weight
		scfm	Nm ³ /h	A	B	C	D	lbs
NF 0025 WS	¼	25	42	2.75	0.98	7.52	3.54	1.5
NF 0035 WS	¾	35	59	2.75	0.98	7.52	3.54	1.5
NF 0050 WS	½	50	85	2.75	0.98	7.52	3.54	1.5
NF 0070 SWS ⁽²⁾	½	70	119	3.94	1.38	8.27	3.54	1.5
NF 0070 WS	½	70	119	3.94	1.38	10.87	4.33	3.3
NF 0125 WS	¾	125	212	3.94	1.38	10.87	4.33	3.3
NF 0175 WS	1	175	297	3.94	1.38	10.87	4.33	3.3
NF 0280 SWS ⁽²⁾	1 ¼	280	476	4.80	1.65	14.96	5.90	5.1
NF 0280 WS	1 ¼	280	476	4.80	1.65	18.11	5.90	5.5
NF 0325 SWS ⁽²⁾	1 ½	325	553	4.80	1.65	14.96	5.90	5.1
NF 0325 WS	1 ½	325	553	4.80	1.65	18.11	5.90	5.5
NF 0400 WS	1 ½	400	680	5.75	2.05	18.98	7.09	8.8
NF 0700 WS	2	700	1189	5.75	2.05	18.98	7.09	8.8
NF 0850 WS	2 ½	850	1445	8.27	2.60	23.43	7.87	18.7
NF 1500 WS	3	1500	2549	8.27	2.60	23.43	7.87	18.7

(1) At 100 psig. For all other pressures, refer to the pressure correction factor table below.



(2) A shorter version of the standard separator for compact installations and/or low liquid loads.

specifications

max recommended operating temperature	212°F
maximum design operating temperature	248°F
maximum allowable operating pressure	232 psig

pressure correction factors

operating pressure (psig)	60	70	85	100	115	145	175	205	235
correction factor	0.76	0.84	0.92	1.00	1.07	1.19	1.31	1.41	1.51

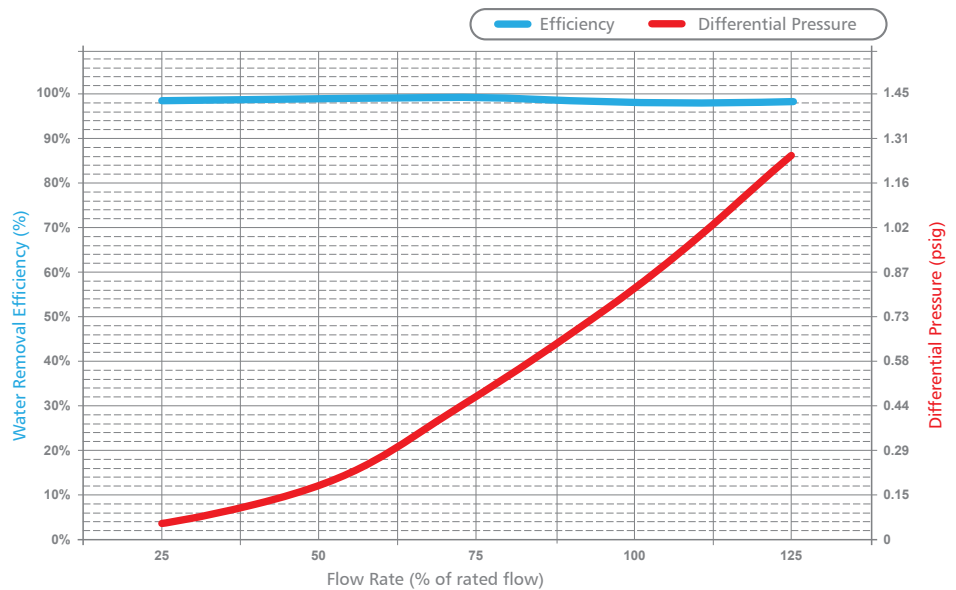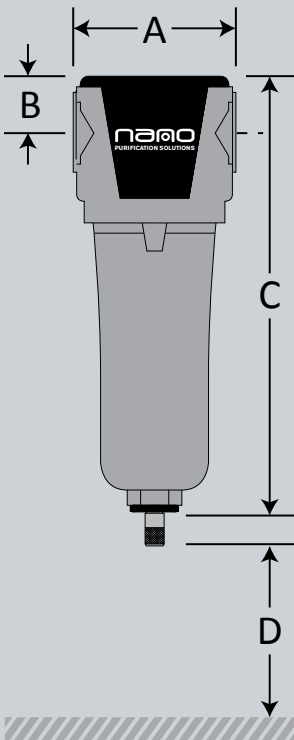

Actual results, using an NWS 070 tested to ISO 12500-4 standards.

technical notes

1

All filters are supplied with an automatic float drain. When high liquid loads are anticipated, we recommend installing a high capacity external condensate drain. Contact support@n-psi.com for available options.